# **ZOMM Series**



# (Zinc Oxide Military Modules) ZOMM 108/ (XXX) /2/8

PD Devices Ltd manufacture a wide range of products to protect against the effects of high altitude detonation of Nuclear devices. The result of such an event is the generation of Electromagnetic Pulses which will induce a high voltage transient in exposed conductors.


The EMP can affect several thousands of square kilometres, with a magnitude of tens of kilovolts.

This could result in serious damage to insulation, cause breakdown of semiconductors and the consequent malfunction of critical equipment.

Most notable would be the failure of Energy Power Supply and Communications Systems. We offer products to satisfy protection for most applications



### **Explanation of Order Code**

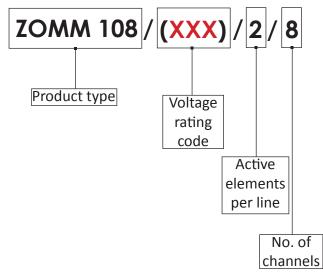

| Specification                                       |                               |  |  |  |  |  |
|-----------------------------------------------------|-------------------------------|--|--|--|--|--|
| No. of channels                                     | 8                             |  |  |  |  |  |
| 50 Shot ( 4/20μs ) Repetitive Duty                  | 600A                          |  |  |  |  |  |
| Response Time                                       | <10ns                         |  |  |  |  |  |
| Continuous Current per Channel                      | 20A                           |  |  |  |  |  |
| Max. ( 8/20μs ) Current per Channel                 | 4500A                         |  |  |  |  |  |
| Leakage Current per Channel at Rated<br>Voltage, DC | <100μΑ                        |  |  |  |  |  |
| Through Inductance                                  | <10µH                         |  |  |  |  |  |
| Volts Drop                                          | Negligible                    |  |  |  |  |  |
| Terminations                                        | 1mm H.D.H.C.<br>Tinned Copper |  |  |  |  |  |
| Bushes                                              | PTFE                          |  |  |  |  |  |
| Earth Connection                                    | To Base Plate                 |  |  |  |  |  |

 ${\tt PD\ Devices\ reserves\ the\ right\ to\ amend\ specifications\ in\ line\ with\ product\ development.}$ 

| (XXX)                            |               |              | 3L1 | 3L2 | 3L3 | 3L4 | 3L5 | 3L6 | 3L7 | 3L8  | 3L9  | 300  | 301  | 302  | 303  | 304  |
|----------------------------------|---------------|--------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| Continu                          | ous           | AC (rms)     | 10  | 13  | 14  | 17  | 20  | 25  | 30  | 35   | 43   | 52   | 75   | 95   | 110  | 120  |
| Operating Voltage                |               | DC           | 12  | 16  | 18  | 22  | 26  | 31  | 38  | 45   | 55   | 66   | 95   | 125  | 143  | 156  |
| Energy per channel (Joules)      |               | (10/1000μs)  | 3.5 | 4.0 | 4.0 | 5.0 | 6.0 | 7.0 | 8.5 | 10.0 | 13.0 | 14.0 | 21.0 | 29.0 | 35.0 | 37.0 |
| Max. Peak<br>Clamping<br>Volts @ | 104           | 10A (8/20μs) |     | 50  | 55  | 60  | 70  | 80  | 95  | 110  | 135  | -    | -    | -    | -    | -    |
|                                  | 50 <i>A</i>   | 50A (8/20μs) |     | -   | -   | -   | -   | -   | -   | -    | -    | 150  | 205  | 250  | 310  | -    |
|                                  | 200A (8/20μs) |              | -   | -   | -   | -   | -   | -   | -   | -    | -    | -    | -    | -    | -    | 345  |

Revision: vPD2, 16/05/18
Information subject to change without notice

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application.




# **ZOMM Series**



(Zinc Oxide Military Modules) ZOMM 108/ (XXX) /2/8

## ZOMM 108/(XXX)/2/8 Diagram in mm

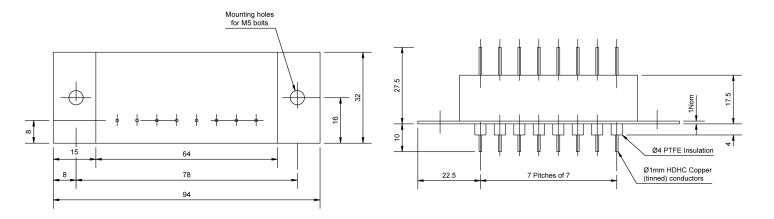

### This ZOMM Application is recommended for Zone 2

# ZONE 1 (INTERNAL) ZONE 2 EMP EARTHS INTERFACE ZONE 2 INTERFACE ZONE 1

INTERFACE ZONE 0

Revision: vPD2, 16/05/18
Information subject to change without notice.

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application.

