

Schuko Unprotected Socket Strip



603DA

PD Devices Schuko unprotected range is an ideal solution for home, office and industrial use.

Featuring a CEE 7/7 hybrid plug and CEE 7/4 type outlet sockets, the ruggedized ABS plastic or Aluminium cases ensure a high impact resistance and long working life.

Characteristics	
Voltage Rating (Nominal)	230V rms
Maximum Current Rating	16A
Power Consumption	Negligible
Lead Length	2m
Part Codes:	SEE ORDER CODES SHEET


Standard Features:

- Red status indicator to show mains power/fuse OK.

Options:

- 2, 4, or 6. (Refer to order codes page)
- Choice of Fire retardant ABS or Aluminium case.
- Choice of CEE 7/7 or CEE 7/7 RCD inlet plug.
- Various additional Features.

ORDER CODES:

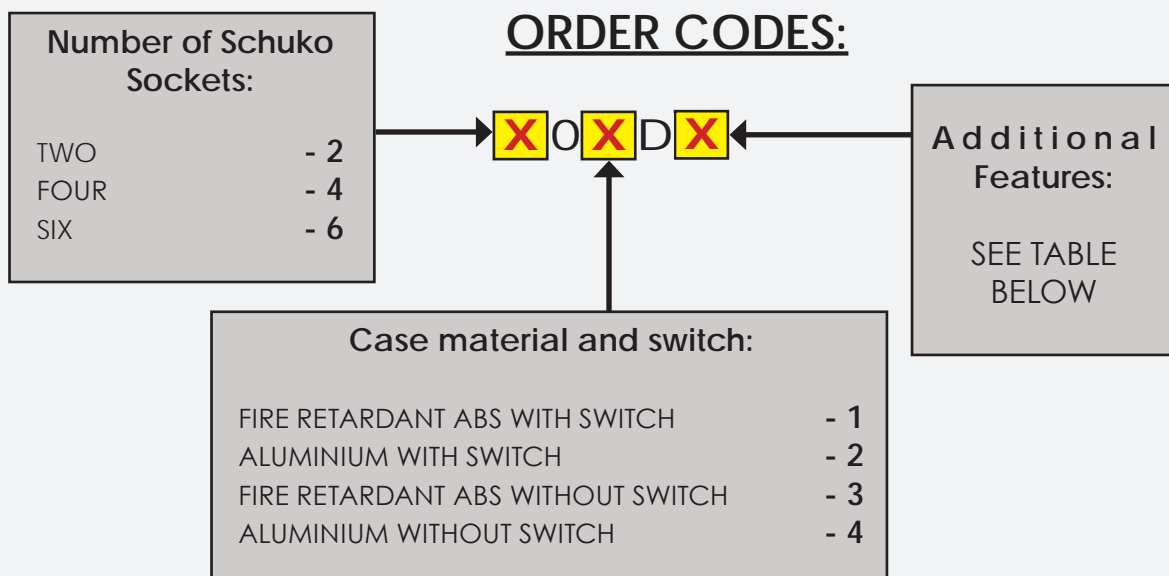

Example – Four Schuko sockets in an Aluminium case, with switch and RCD plug – Part Code: 402DL

Additional Features:	
None	-A
RJ11, RJ14, RJ25 – Phone or DSL protection (Protection supports from 1 to 3 lines on the same socket). 1x Input, 1x Output.	-B
RJ45 - (T568A/B) – 10/100/1000 BaseT Ethernet. 1x Input, 1x Output.	-C
RJ45 - (T568A/B) - 10/100/1000 BaseT Ethernet + Power over Ethernet protection. 1x Input, 1x Output.	-E
BT (BS6312) style telephone protection. Supports 2, 4 and 6 wire configurations. 1x Input, 1x Output.	-F
PAL (IEC 169/2) RF connector - TV Antenna, FM Radio Antenna and Cable TV Protection. 1x Input, 1x Output.	-G
F-Type RF connector – Satellite TV, Cable TV, Cable DSL and TV/Radio Antenna. 1x Input, 1x Output.	-H
BNC Type RF connector – CCTV, Analogue and Serial Digital Interface video signals, Test equipment, Radio antenna and 10BASE2 Ethernet installation Protection. 1x Input, 1x Output.	-I
Fixed (hard wired) lead with BS1363 (standard UK) plug.	-J
RCD Plug.	-L

NB. Multiple additional features can be selected.
 Example - Six Schuko Sockets with an Aluminium case, NO switch, RCD plug and F Type RF connector (Satellite TV, Cable TV Protection) – Part Code: 604DHL

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance of any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for these products is set forth in our standard terms and conditions of sale.

We, PD Devices Ltd are continually improving our technology within our products we offer and therefore reserve the right to amend any of the specifications at anytime.